



Motorized Screen

Remaco PRO-L motorized projection screen is one of the most technically advanced screen today. It has revolutionized a typical screen design in terms of features and outlook. Unlike normal motorized screens, it is made of high quality screen fabric and designed for ease of operation control and installation.

- ~ Infrared Remote to control screen up/stop/down position
- ~ Electronic Screen Control with wide angle sensor
- ~ Direct connection to AV Control System
- ~ More durable (Due to smooth roll up)
- ~ Compact, Light weight and Beautiful Finishing
- ~ Ease of installation
- ~ Universal Mounting kit for all types mounting
- ~ Adjustable setting for desired up/down position
- ~ Adjustable screen position horizontally



Screen Sizes

Model	Diagonal (Inches)	Width x Height
Standard Sizes (with 3 sides black borders)		
PRO-L3030	120"	120" x 120" (305 x 305cm)
PRO-L3636	144"	144" x 144" (366 x 366cm)
PRO-L3939	154"	154" x 154" (390 x 390cm)
PRO-L4040	158"	158" x 158" (400 x 400cm)
PRO-L4343	168"	168" x 168" (426 x 426cm)



Electronic Screen Control (ESC)

Video & HDTV Format (with 4 sides black borders)

PRO-L3023V	150"	117" x 88" (297 x 223cm)
PRO-L3627V	180"	141" x 106" (358 x 269cm)
PRO-L4030V	200"	154" x 116" (392 x 294cm)
PRO-L3319H	150"	131" x 74" (332 x 187cm)
PRO-L3922H	180"	157" x 88" (398 x 224cm)




Infrared Remote Control


Universal Brackets Kit for all mounting

Specifications :


Motor Speed :	26 rpm
Operating :	120 deg. Celsius (thermostat cut off motor)
Fabric Roll Speed :	7.35 m/min (12.3 cm/sec)
Screen Gain :	1.2
Viewing Angle :	160 deg. viewing cone
Screen Materials :	Matte White with fibreglass coating, Flame Retardant and fungus resistant
External Wired Control:	Normally open, momentary contact closure (voltage free)
IR Remote Sensitivity Distance :	Maximum 15 metres
Sensor Coverage :	160 deg. (horizontal) 150deg. (vertical)
Power Consumption :	195W (with load) 10W (without load)
Current :	1.8 or 0.85 Amperes
Voltage :	100 - 120 VAC or 220 - 240 VAC, 50/60 Hz

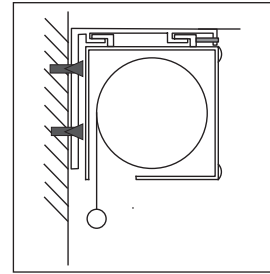


Wall Mount




Ceiling Mount

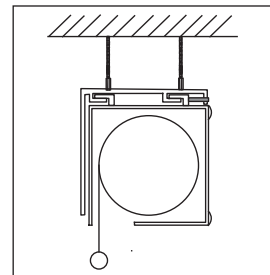


Ceiling Suspension




Side Pelmet Mount

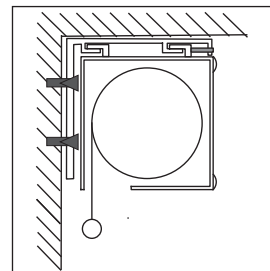


Corner Mount

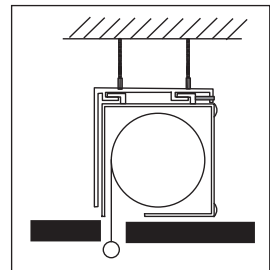


Ceiling Recessed

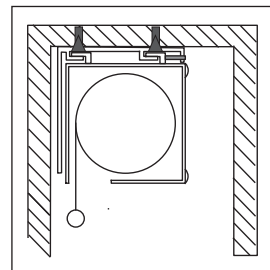

Pelmet Mount



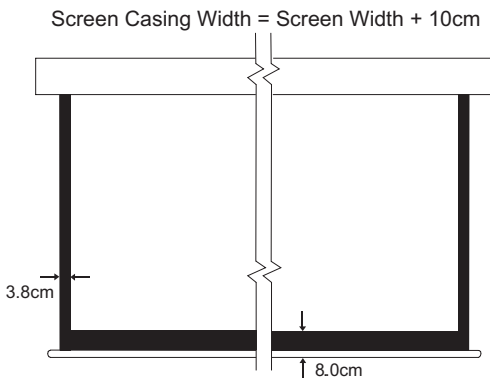


Screen with 3 sides black border

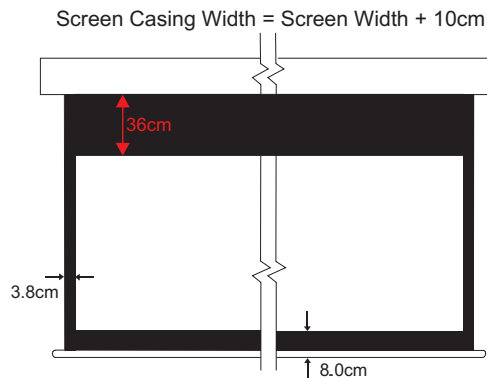

Screen with 4 sides black border

* For details dimension ,
please refer to technical specifications at
www.remacotech.com

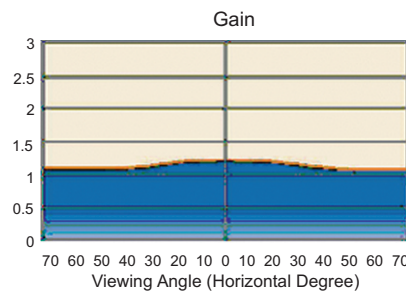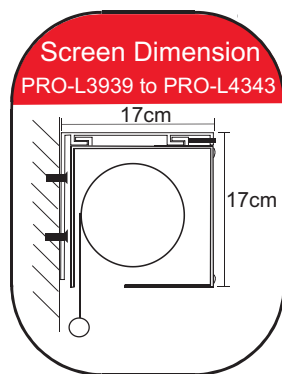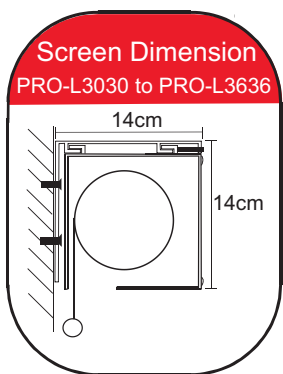

Video Format (4:3), HDTV Format (16:9) and Nonstandard screen sizes are also available.

Please consult your dealer for more information.

All screens supplied are with black borders. Every screen is supplied with remote control, electronic screen control and universal brackets.