



Motorized Screen


Remaco motorized projection screen is one of the most technically advanced screen today. It has revolutionized a typical screen design in terms of features and outlook. Unlike normal motorized screen, it is made of high quality screen fabric and designed for ease of operation control and installation.

- ✓✓ Infrared Remote to control screen up/stop/down position
- ✓✓ Electronic Screen Control with wide angle sensor
- ✓✓ Direct connection to AV Control System
- ✓✓ More durable (Due to smooth roll up)
- ✓✓ Compact, Light weight and Beautiful Finishing
- ✓✓ Ease of installation
- ✓✓ Universal Mounting kit for all types mounting
- ✓✓ Adjustable setting for desired up/down position
- ✓✓ Adjustable screen position horizontally

Screen Sizes

Model Diagonal (Inches) Width x Height

Model	Diagonal (Inches)	Width x Height
Standard Size		
PRO-1515		62" x 62" (158 x 158 cm)
PRO-1818		72" x 72" (183 x 183 cm)
PRO-2121		84" x 84" (214 x 214 cm)
PRO-2424		96" x 96" (244 x 244 cm)
PRO-2727		108" x 108" (275 x 275 cm)
Video Format (4:3)		
PRO-1310V	62"	50" x 37.5" (127 x 95 cm)
PRO-1612V	80"	64" x 48" (163 x 122 cm)
PRO-1814V	90"	72" x 54" (183 x 137 cm)
PRO-2015V	100"	80" x 60" (203 x 152 cm)
PRO-2217V	110"	88" x 66" (224 x 168 cm)
PRO-2418V	120"	96" x 72" (244 x 183 cm)
PRO-2721V	135"	108" x 81" (274 x 206 cm)
HDTV Format (16:9)		
PRO-1609H	70"	61" x 34.3" (155 x 87 cm)
PRO-1810H	80"	70" x 39.4" (178 x 100 cm)
PRO-2011H	92"	80" x 45" (203 x 114 cm)
PRO-2212H	100"	87" x 49" (221 x 124 cm)
PRO-2414H	110"	96" x 54" (244 x 137 cm)
PRO-2715H	123"	107" x 60" (272 x 152 cm)

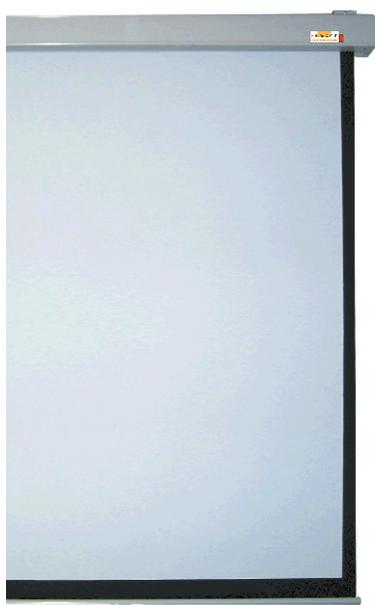

Electronic Screen Control (ESC)




Infrared Remote Control



Specifications :

Motor Speed :	30 rpm
Operating :	120 deg. Celsius (thermostat cut off motor)
Fabric Roll Speed :	5.0 m/min (8.3 cm/sec)
Screen Gain :	1.2
Viewing Angle :	160 degrees viewing cone
Screen Materials :	Matte White with fibreglass coating, Flame Retardant and fungus resistant
External Wired Control:	Normally open, momentary contact closure (voltage free)
IR Remote Sensitivity Distance :	Maximum 15 metres
Sensor Coverage :	160 deg. (horizontal) 150deg. (vertical)
Power Consumption :	195W (with load) 10W (without load)
Current :	1.8 or 0.85 Amperes
Voltage :	100 - 120 VAC or 220 - 240 VAC, 50/60 Hz

**Universal Brackets Kit
for all mounting**

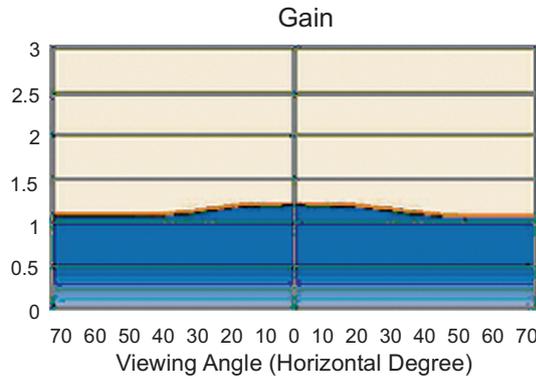


Video Format Screen with 4 sides black border

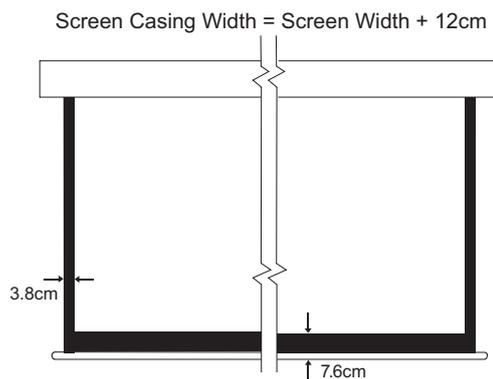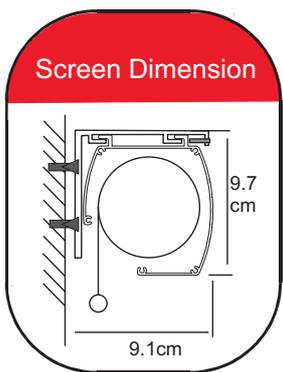


* For details dimension ,
please refer to technical specifications at
www.remacotech.com


All screens supplied are with black borders. Every screen is supplied with remote control, electronic screen control and universal brackets.




Wall Mount




Ceiling Mount




Ceiling Suspension




Side Pelmet Mount



Corner Mount



Ceiling Recessed



Pelmet Mount