


## Key Features

- 3rd generation LED technology for greater sustainability
- Maintenance free: 30,000-hour light source life and less power consumption
- 3,200 ANSI Lumens offering bright images in any environment
- 0.49 short throw ratio for glare-free and shadow-free presentations
- Ease of use: instant power on/off, H/V keystone, and LAN control



## Product Description

The LS560WE is ViewSonic's lamp-free high brightness WXGA short throw projector for business and education. Adopting industry-leading 3rd generation LED technology, the LS560WE delivers 3,200 ANSI Lumens while eliminating the use of toxic mercury, reducing the cost and effort of frequent lamp replacement and lowering the total cost of ownership. The lamp-free light source offers enhanced sustainability for a greener environment while delivering a wider color gamut for bright and vivid images in a meeting room, classroom, or any other environment. The 0.49 short throw lens provides a 100" screen from just 1.1m away, delivering exceptional space efficiency and freeing presenters from blinding lights. The projector boasts incredible ease of use with instant power on/off, easy image correction with H/V keystone and 4 corner adjustment, and 360° tilt angle projection for flexible applications. Moreover, its comprehensive LAN control makes multiple device management a breeze and is compatible with Crestron, AMX, Extron, PJ Link, ATEN, and ViewSonic's vController.

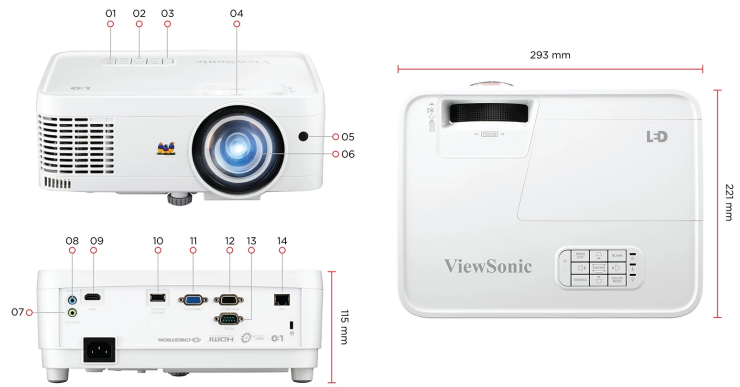

- |                  |                            |
|------------------|----------------------------|
| 1. LED Indicator | 8. Audio In                |
| 2. Keypad        | 9. HDMI                    |
| 3. Power Button  | 10. USB-A (5V/2A, Service) |
| 4. Focus Ring    | 11. Computer In            |
| 5. Front IR      | 12. Monitor Out            |
| 6. Lens          | 13. RS232                  |
| 7. Audio Out     | 14. RJ45 (LAN Control)     |

**Visit Us** [www.viewsonic.com](http://www.viewsonic.com)

## SPECIFICATION

Native Resolution:	1280x800
DMD Type:	DC3
Brightness:	3200 (ANSI Lumens)
Contrast Ratio:	3000000:1
Display Color:	1.07 Billion Colors
Light Source Type:	LED
Light Source Life (hours) with Normal Mode:	30000
Lens:	F=2.6, f=6.9mm
Projection Offset:	110% +/-5%
Throw Ratio:	0.49
Optical Zoom:	Fixed
Digital Zoom:	0.8x-2.0x
Image Size:	60"-300"
Throw Distance:	0.63m-1.58m (87"@0.92m)
Keystone:	H: +/-40° , V: +/-40°
Audible Noise (Normal):	34dB
Audible Noise (Eco):	28dB
Input Lag:	16ms
Resolution Support:	VGA(640 x 480) to FullHD(1920 x 1080)
HDTV Compatibility:	480i, 480p, 576i, 576p, 720p, 1080i, 1080p
Horizontal Frequency:	15K-102KHz
Vertical Scan Rate:	23-120Hz
Interactive Camera:	Optional (vTouch-10s)

## INPUT

Computer in (share with component):	1
HDMI:	1 (HDMI 1.4/ HDCP 1.4)
Audio-in (3.5mm):	1

## OUTPUT

Monitor out:	1
Audio-out (3.5mm):	1
Speaker:	2W
USB Type A (Power):	1 (5V/2A)

## CONTROL

RS232 (DB 9-pin male):	1
RJ45 (LAN control):	1
USB Type A (Services):	1 (share with USB A Output)

## OTHERS

Power Supply Voltage:	100-240V +/- 10%, 50/60Hz (AC in)
Power Consumption:	Normal: 229W Standby: <0.5W
Operating Temperature:	0~40°C
Carton:	Brown
Net Weight:	2.85kg
Gross Weight:	4.05kg
Dimensions (WxDxH) with Adjustment Foot:	293x221x115mm
Packing Dimensions:	365x300x188mm
OSD Language:	English, French, Spanish, Thai, Korean, German, Italian, Russian, Swedish, Dutch, Polish, Czech, T-Chinese, S-Chinese, Japanese, Turkish, Portuguese, Finnish, Indonesian, India, Arabic, Vietnamese, Greek, Hungarian. Total 24 languages
User Guide Language:	English, S-Chinese, T-Chinese, Indonesian, Finnish, French, German, Italian, Japanese, Korean, Polish, Portuguese, Russian, Spanish, Swedish, Turkish, Arabic, Czech, Thai, Vietnamese, total 20 languages

## STANDARD ACCESSORY

Power Cord:	1
Remote Control:	1
QSG:	Yes
Lens Cover:	Yes
Warranty Card:	Yes (CN Only)

## OPTIONAL ACCESSORY

Wall/Ceiling Mount:	PJ-WMK-305 PJ-WMK-007
Carry Bag:	PJ-CASE-008